



PLA


DONNEES
TECHNIQUES

MODINOX
CONDUITS DE CHEMINEE

PLA


PLA INOX ET LAQUÉ NOIR

Élément droit

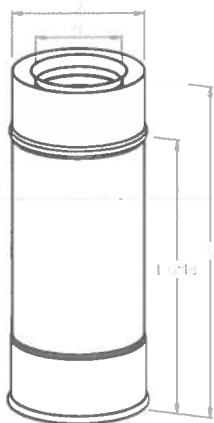


Ø nom.	Dimensions en millimètres		
	80	100	130
d	80	100	130
D	125	153	200
L	1000-500-330-250		
L utile	940-440-270-190		

Élément droit réglable

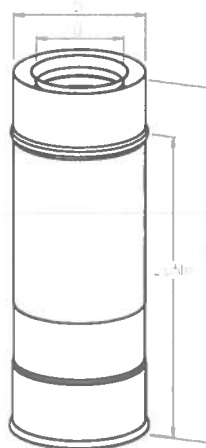

Ø nom.	Dimensions en millimètres		
	80	100	130
d	80	100	130
D	125	153	200
L	300 à 500 mm		
L utile	240 à 440 mm		


Élément coude 15°



Ø nom.	Dim. en mm		
	80	100	130
d	80	100	130
D	125	153	200
H1	110	115	120
H2	50	55	60
H3	110	115	120

Permet un dévoiement à 15°.


Élément coude 30°



Ø nom.	Dim. en mm		
	80	100	130
d	80	100	130
D	125	153	200
H1	115	125	135
H2	55	65	75
H3	115	125	135

Permet un dévoiement à 30°.


Élément de ramonage



Ø nom.	Dim. en mm		
	80	100	130
d	80	100	130
D	125	153	200
L	400 mm		
L utile	340 mm		

Permet la visite et l'entretien du conduit de fumée.


Élément coude 45°



Ø nom.	Dimensions en millimètres		
	80	100	130
d	80	100	130
D	125	153	200
H1	125	130	145
H2	65	70	85
H3	125	130	145

Permet un dévoiement à 45°.

Élément coude 90°




Ø nom.	Dimensions en millimètres		
	80	100	130
d	80	100	130
D	125	153	200
H1	125	130	145
H2	200	210	240
H3	140	150	180


Permet un raccordement à 90°.

PLA INOX ET LAQUÉ NOIR


TÉ 90° FUMÉE MÂLE




TÉ 90° FUMÉE FEMELLE



TÉ DOUBLE MÂLE



TÉ DOUBLE FEMELLE



Té 90° fumée standard (M et F)


Ø nominal	Dimensions en millimètres				
	80	100	100	130	130
D	125	153	153	200	200
d2	80	80	100	100	130
L	220	220	240	240	255
A	90	90	100	100	115
B	70	70	80	80	95

Permet un raccordement fumée à 90°.

Té 90° double fumée (M et F)

Ø nominal	Dimensions en millimètres				
	80	100	100	130	130
D	125	153	153	200	200
d2	80	80	100	100	130
L	220	220	240	240	255
A	90	90	100	100	115
B	70	70	80	80	95

Permet un raccordement fumée à 90°.



Té 90° air Ø 80


D	Dimensions en millimètres		
	80	100	130
d	125	153	200
L utile	240	260	290
L	180	200	230

Permet un raccordement air à 90°.

Té 90° air Ø 60

d	Dimensions en millimètres		
	80	100	130
L	125	153	200
L utile	220	220	220
L	160	160	160


Permet un raccordement air à 90°.



Té 135° air



D	Dimensions en millimètres		
	80	100	130
d	125	153	200
L utile	235	235	235
L	175	175	175

Permet un raccordement air à 135°.

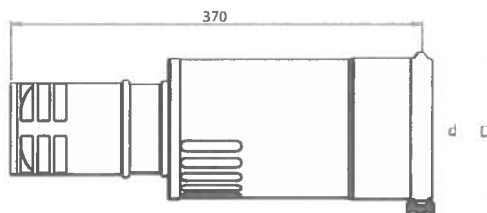



Terminal horizontal

d	Dimensions en millimètres		
	80	100	130
D	125	153	200




Adaptateur PLA / PTR

d	Dimensions en millimètres			
	80	100	100	130
D	125	153	200	200
d2	80	100	130	150
D2	140	160	190	210
L	250	260	290	450
A	176	185	200	-
B	95	115	120	-
C	84	85	100	-





Adaptateur PLA / GI-DI

d	Dimensions en millimètres	
	80	100
D	125	153
Ø gaine	80	100
Ø nominal GI-DI	153/180/200/230/250/300	

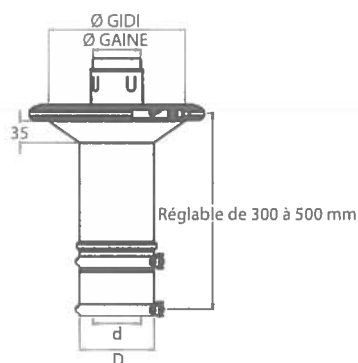

Adaptateur PLA / GI-DI réglable


d	Dimensions en millimètres	
	80	100
D	125	153
Ø gaine	80	100
Ø nominal GI-DI	153/180/200/230/250/300	



Adaptateur boisseau

d	Dimensions en millimètres	
	80	100
D	125	153
Ø gaine	80	100
Ø nominal GI-DI	300x300 / 350x350 / 400x400 / 300x500 / 400x500	

Raccord Polytoft souche vide



Ø nominal	80	100	130
d	79	99	129

ASSEMBLAGES DES COUDES PLA

d	D	Dévolement à 15°			Dévolement à 30°			Dévolement à 45°		
		80	100	130	80	100	130	80	100	130
2 coudes	A	41	44	47	85	95	105	134	141	163
	B	315	334	354	317	355	392	324	341	393
2 coudes + L250	A	91	93	96	180	190	200	315	320	335
	B	498	518	537	482	519	556	459	476	527
2 coudes + L330	A	111	114	116	220	230	240	325	332	354
	B	575	595	615	551	588	626	515	532	584
2 coudes + L500	A	155	158	160	305	315	325	445	453	474
	B	740	759	779	698	736	773	635	653	704
2 coudes + L1000	A	285	287	290	555	565	575	799	806	827
	B	1223	1242	1262	1131	1169	1206	989	1006	1057

